

Pinch Pleat Drapery

This drapery style provides the best solution for guest rooms and other areas where blackout is desired. Typically requires less labor than Ripplefold® drapery, but may require more fabric to achieve a similar visual fullness.


Fabrication Details

- Standard fabrication is 3-Finger Pinch Pleat (also known as Triple Pleat).
- Attaches to slide carriers with pin hooks.
- Headings consist of 3.5" wide buckram top stitched to face and lining, then folded over to bring lining to top of panel.
- Headings can be suspended under to track or over the face of the track.
- Features three-finger pinch pleats, spaces approx. 3" - 5" apart.
- Fullness: Typical fullness of pleats is 200 - 250%.
 - 200%
 - 250%
 - 300%
- Selvage edges are removed or clipped before fabrication, as necessary.
- Hems: 3.0" double folded at bottom.
 - Side hems: 0.25" double-turned folds.
 - Include 1/3 oz corner lead weight.
 - Blind stitched using thread to complement fabric color.
 - Blackout and lining are blind stitched.

Lining

- 2-Pass Blackout - White / Grey FR 54"
- 3-Pass Blackout - White / White FR 54"
- Thermal - White
- 100% Polyester FR
- Polycotton (65% Polyester, 35% Cotton)

Lining is recommended for all drapery, however unlined drapery is available upon request. Blackout is dryclean only - it cannot be laundered.

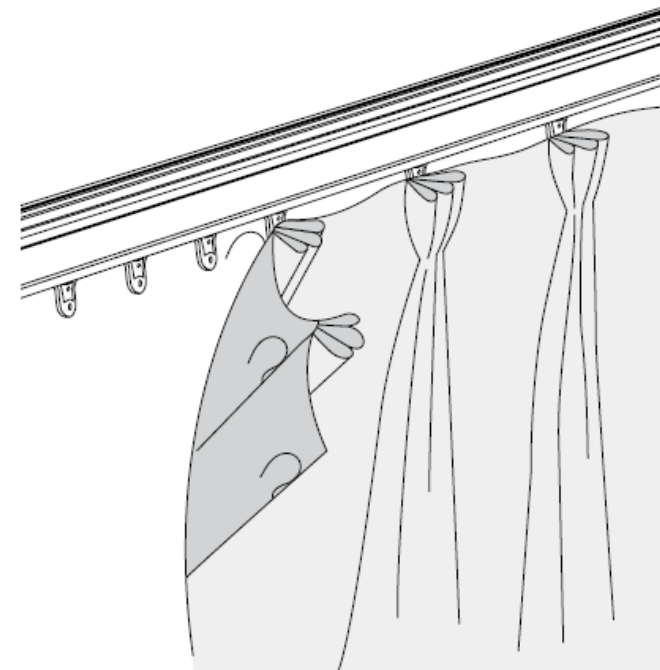

General - Pinch Pleat

Hardware

- Baton and ADA Baton (36", 48", 60" lengths) - Batons are hidden behind drapery.
- Cord Draw - Can be specified with tension pulley to hold down cord for safety issues.
- Hand Draw - Excellent hardware system for use in healthcare applications; no baton or cord is used - drapery is hand-drawn.
- Motorized - Motorized mechanisms, carriers, and tracks are supplied per client specification.
- Traverse rods are on decorative hardware.

General

All work is performed to meet the following requirements.

- Drapery fabricated to size specifications within 0.5" lengths and 1.0" widths.
- Fabrics pattern-matched according to commercial standards.
- Multiple-width drapery is overlock stitched with half widths placed on the return side of the drapery.
- Side hems are blind stitched.
- Drapery linings are joined by overlocking and finished with a 2.5" hem. Linings are placed 0.75" above bottom of a drapery.
- Standard rod length is 48"; ADA rod length is 60".
- Order as "rod length" x "finished length."

Ripplefold® is a registered trademark of Kirsch.

